


Technical data sheet


Model TCG
for outward opening all-glass doors

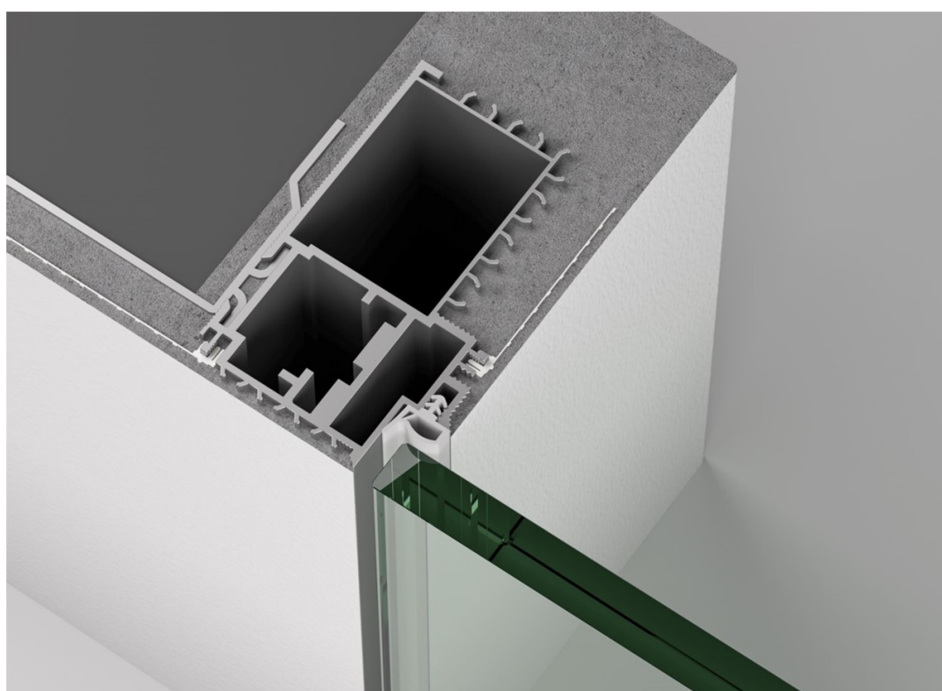

Index

Profile detail.....	2
Recommendations	3
Suitable hinges.....	3
Suitable closing plates.....	3
Suitable seals.....	3

Profile detail

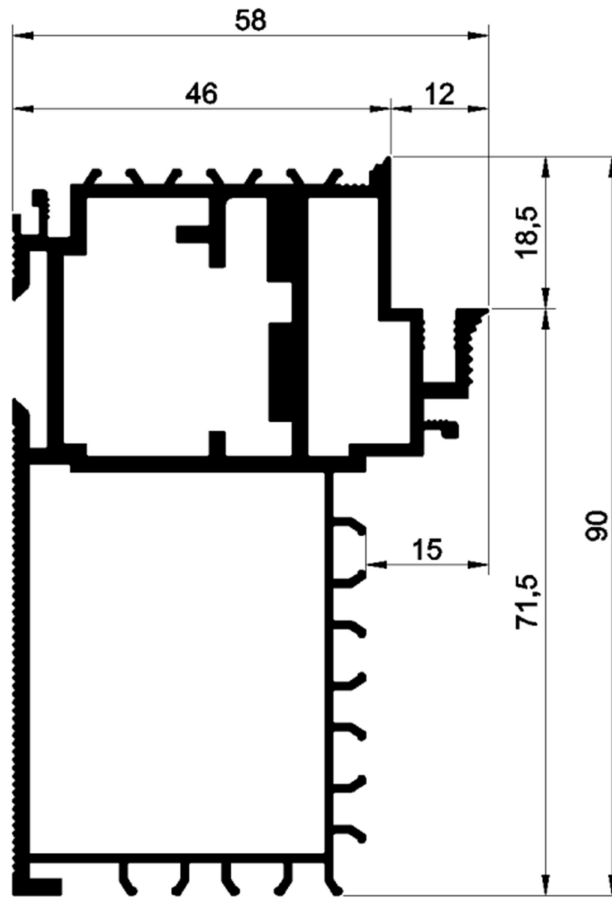

Model TCG

Suitable solid and dry construction

The frame profiles are supplied mitre-cut to suit door size, and machined to suit concealed hinges, lock strikes and other hardware. In combination with the snapIn corner connectors and the mounting brackets, this enables quick assembly and professional installation. The snap-in mesh ensures no plaster cracks between wall and frame. Suits standard or floor-to-ceiling doors. Suits standard or floor-to-ceiling all-glass doors of 8 and 10 mm.

Recommendations

On the basis of detailed tests and long-term experiences our technical office has prepared a recommendation-list regarding the selection of hinges, closing panels and seals. These lists are practical guidelines and non-exhaustive.

RECOMMENDATION Suitable hinges		
Producer	Designation	Weight
Simonswerk www.simonswerk.de	Tectus TEG 310 2D	60 kg

RECOMMENDATION Suitable striking plates	
Producer	Designation
Simonswerk www.simonswerk.de	Closing magnet KCM 50

RECOMMENDATION Suitable seals/gaskets	
Producer	Designation
Deventer Profile GmbH www.deventer-profile.com	DS 6577a
	S 6577a
	S 7381
	SP 7677
Helmut Goll GmbH www.helmutgoll.com	1022
Primo Profile GmbH www.primo.com	EV-5990
SchlegelGiesse – Giesse S.p.A. www.schlegelgiesse.com	QL 3113

We guarantee for a high quality of our products. Our processing guidelines are based on tests and practical experiences; they are only indication without assurance of properties, we have no influence on condition of construction sites and the realizations of the works

Country specific regulations, which consist on regional standards, building regulations, processing and industrial guidelines, can guide to specific processing recommendations.