

Technical data sheet

**Model TCS50  
 for inward opening doors**



**Index**

Profile detail..... 2

Recommendations ..... 3

    Suitable hinges..... 3


    Suitable closing panels ..... 4

    Suitable door closers..... 4

    Suitable seals..... 5

Door leaf ..... 6

## Profile detail

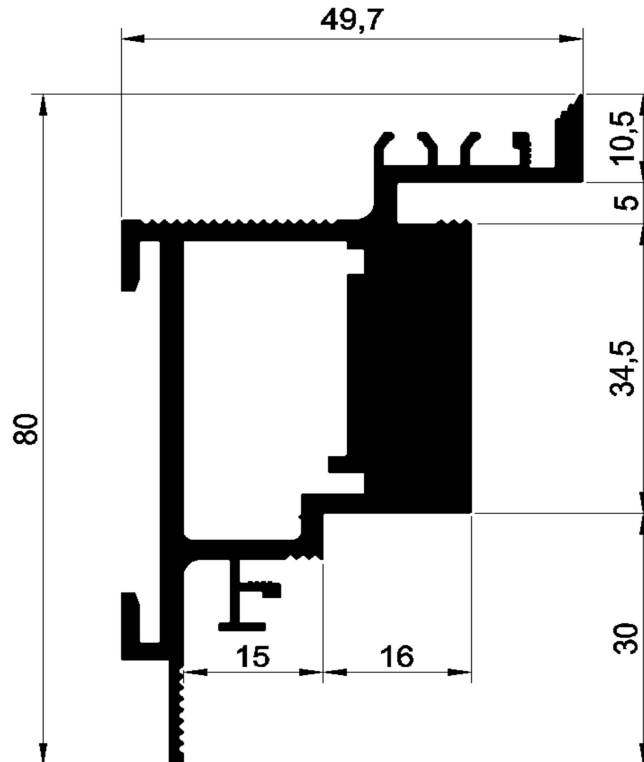

### Model TCS50

#### Suitable for solid and dry construction

The frame profiles are supplied mitre-cut to suit door size, and machined to suit concealed hinges, lock strikes and other hardware. In combination with the snapIn corner connectors and the mounting brackets, this enables quick assembly and professional installation. The snap-in mesh ensures no plaster cracks between wall and frame. Suits standard or floor-to-ceiling doors.

Here you can find the assembling video:



masonry construction



drywall

## Recommendations

On the basis of detailed tests and long-term experiences our technical office has prepared a recommendation-list regarding the selection of hinges, closing panels and seals. These lists are practical guidelines and non-exhaustive.

<b>RECOMMENDATION</b>		
<b>Suitable hinges</b>		
<b>Producer</b>	<b>Designation</b>	<b>Weight</b>
AGB <a href="http://www.agb.it">www.agb.it</a>	Eclipse 3.0	40/60 kg
	Eclipse 3.2	40/60 kg
Anselmi <a href="http://www.anselmisrl.it">www.anselmisrl.it</a>	140 3D	40 kg
	160 3D	60 kg
	150 3D	40 kg
	180 3D	80 kg
Basys <a href="http://www.basys.biz">www.basys.biz</a>	Pivota DX38 „N“ 3-D (Design)	60 kg
	Pivota DX42 3-D (Design)	60 kg
	Pivota DX43 3-D (Design)	60 kg
	Pivota DX78 3-D (Design)	80 kg
	Pivota DX60 3-D (Design)	100 kg
	Pivota DX62 3-D (Design)	100 kg
	Pivota DX60/DX100 (Design)	120 kg
Ceam <a href="http://www.ceamitalia.it">www.ceamitalia.it</a>	1129	25/40 kg
	1130	40/60 kg
	1329	35 kg
	1430	60 kg
Krona Koblenz <a href="http://www.kronakoblenz.com">www.kronakoblenz.com</a>	Kubica 2460	60 kg
	Kubica 5080	45/60 kg
	Kombi K1019	40/52 kg
	Kubica 6200	45/60 kg
	Kubica 6400	30/45 kg
	Kubi7 7000	40/50 kg
	Kombi 1060	60 kg

	Atomika Slim K8060	60 kg
	Atomika Karakter K8120	120 kg
	Atomika Karakter K8080	80/100 kg
	Kubica 2760	60 kg
Otlav <a href="http://www.otlav.it">www.otlav.it</a>	Invisacta IN230	40/60 kg
	Invisacta IN235	40 kg
SFS <a href="http://www.sfs.ch">www.sfs.ch</a>	(intec) W-TEC 3D + 60	60 kg
Simonswerk <a href="http://www.simonswerk.com">www.simonswerk.com</a>	Tectus TE 240 3-D	60 kg
	Tectus TE 340 3-D	80 kg

<b>RECOMMENDATION</b> <b>Suitable striking plates</b>	
Producer	Designation
AGB <a href="http://www.agb.it">www.agb.it</a>	Easy-Matic XT B01402.11.XX
	Easy-Fix B01402.40.XX
	Minimal XT B02402.05.XX
	Alutop XT B02402.09.XX
	Minimal Plus XT B02402.28.XX
	Electric B02800.90.XX
	B01.000.05.06
Basys <a href="http://www.basys.biz">www.basys.biz</a>	Basys SBL 2-L adjustable V3 Li/Re, magnetic
	Basys SBL 2-L adjustable V3 Li/Re 15mm
	Basys SBL 2-L adjustable V3 Li/Re 13mm
	Basys SBL 2-L adjustable V3 Li/Re 8mm
	SBL Nr.37 Li/Re
	SBL Nr. 106 adjustable V3 Li/Re
	SBL Nr. 64 adjustable V3 Li/Re
	SBL Nr. 45
SBL Nr. 72 Li/Re	
Bonaiti Serrature <a href="http://www.bonaiti.it">www.bonaiti.it</a>	G992
	G198
	GR95
	GIS8


	B998
	B996
	GR96
	GR97
	GIR8
	GS91
	G995
Dormakaba <a href="http://www.dormakaba.com">www.dormakaba.com</a>	SB/MAG/120.20.2,0
	SB/MAG/210.20.2,0
	SB12/MAG/VAR/DS
	SB/MAG/VAR/NL flanged
KFV <a href="http://www.kfv.de">www.kfv.de</a>	FSS 116-200-20HR
	FSS 116-245-20HR
	FSS 116-245-18HR
	FSS 116-120-20HR
SSF <a href="http://www.ssf.de">www.ssf.de</a>	MG 50
Simonswerk <a href="http://www.simonswerk.com">www.simonswerk.com</a>	KCM 50
	KCM 50/H

<b>RECOMMENDATION</b> <b>Suitable door closers</b>	
<b>Producer</b>	<b>Designation</b>
Athmer <a href="http://www.athmer.de">www.athmer.de</a>	Porti 5371
Dormakaba <a href="http://www.dormakaba.com">www.dormakaba.com</a>	ITS 96 EN 2-4 + G 96 N20 K8
Geze <a href="http://www.geze.com">www.geze.com</a>	Boxer EN 2-4 + 12 mm Slide rail

**RECOMMENDATION**  
**Suitable seals/gaskets**

Producer	Designation
Deventer Profile GmbH <a href="http://www.deventer-profile.com">www.deventer-profile.com</a>	D S6922 a
Helmut Goll GmbH & Co <a href="http://www.helmutgoll.com">www.helmutgoll.com</a>	A 1020
PRIMO Profile GmbH <a href="http://www.primo.com">www.primo.com</a>	ACF-5602 H
SchlegelGiesse – Giesse S.p.A. <a href="http://www.schlegelgiesse.com">www.schlegelgiesse.com</a>	QL 3096
	QL 3104
AGS seals black/white 5,50m/6,60m	Art. Nr. 50096/50097

## Door leaf

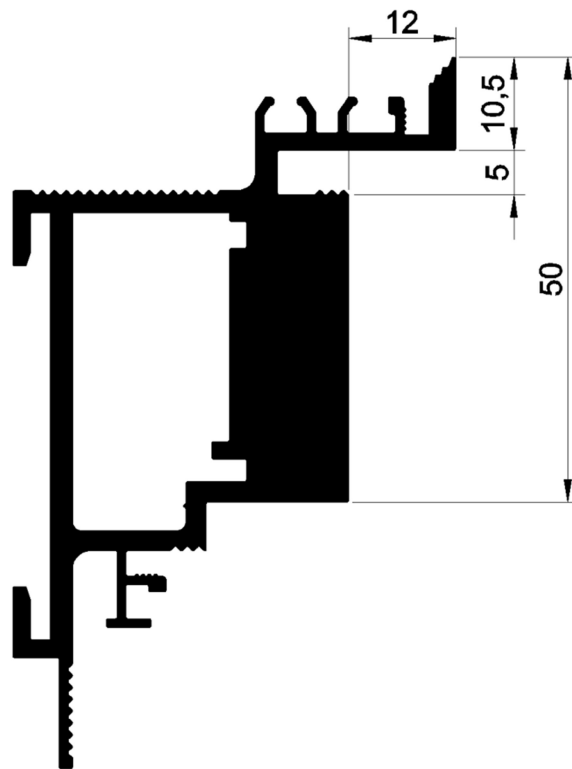

### Rebate dimension for 5mm door seal



We guarantee for a high quality of our products. Our processing guidelines are based on tests and practical experiences; they are only indication without assurance of properties, we have no influence on condition of construction sites and the realizations of the works. Country specific regulations, which consist on regional standards, building regulations, processing and industrial guidelines, can guide to specific processing recommendations.