

Technical data sheet

---

**Model TP**  
**for inward/outward opening doors**


---



**Index**

Profile detail.....	2
Recommendations .....	3
Suitable hinges.....	3
Suitable striking plates .....	3
Suitable seals.....	3

## Profile detail

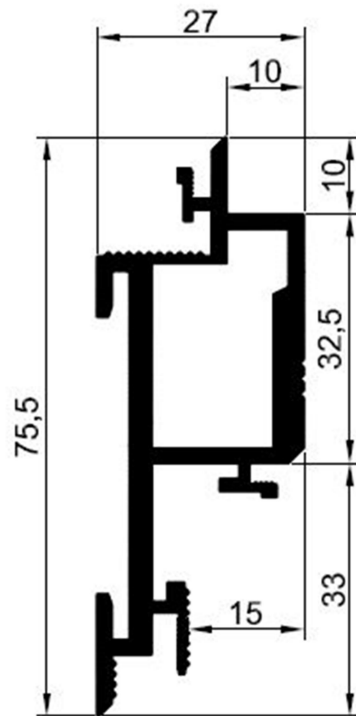

### Model TP

Description	Item number	Standard lengths*
TP	10121-11	1100 mm
TP	10121-22	2200 mm
TP	10121-27	2750 mm
TP	10121-33	3300 mm
TP	10121-55	5500 mm

\*Special lengths on request.

### Suitable for solid and dry construction

The sub-frame profiles are supplied either mitre-cut to size, or loose for cutting and assembly on-site. They are assembled using locking mitre corner inserts, temporary corner braces and bottom spreader bar. Then the frame is inserted to one side of the opening, attached using moveable brackets. The snap-in mesh ensures no plaster cracks between wall and frame. The timber frame and door is hung from the sub-frame, creating a shadow gap. Suits standard or floor-to-ceiling doors.

## Recommendations

On the basis of detailed tests and long-term experiences our technical office has prepared a recommendation-list regarding the selection of hinges, closing panels and seals. These lists are practical guidelines and non-exhaustive.

<b>RECOMMENDATION</b> <b>Suitable hinges</b>	
Producer	Website
Basys	<a href="http://www.basys.biz">www.basys.biz</a>
Krona Koblenz	<a href="http://www.kronakoblenz.com">www.kronakoblenz.com</a>
Simonswerk	<a href="http://www.simonswerk.com">www.simonswerk.com</a>

<b>RECOMMENDATION</b> <b>Suitable striking plates</b>	
Producer	Website
AGB	<a href="http://www.agb.it">www.agb.it</a>
Bonaiti Serrature	<a href="http://www.bonaiti.it">www.bonaiti.it</a>
Dormakaba	<a href="http://www.dormakaba.com">www.dormakaba.com</a>
KFV	<a href="http://www.kfv.de">www.kfv.de</a>

<b>RECOMMENDATION</b> <b>Suitable seals/gaskets</b>	
Producer	Website
Helmut Goll GmbH & Co.	<a href="http://www.helmutgoll.com">www.helmutgoll.com</a>
Deventer Profile GmbH	<a href="http://www.deventer-profile.com">www.deventer-profile.com</a>
PRIMO Profile GmbH	<a href="http://www.primo.com">www.primo.com</a>
SchlegelGiesse – Giesse S.p.A.	<a href="http://www.schlegelgiesse.com">www.schlegelgiesse.com</a>
AGS seals black/white 5,50m/6,60m	Art. Nr. 50096/50097

We guarantee for a high quality of our products. Our processing guidelines are based on tests and practical experiences; they are only indication without assurance of properties, we have no influence on condition of construction sites and the realizations of the works, Country specific regulations, which consist on regional standards, building regulations, processing and industrial guidelines, can guide to specific processing recommendations.