


Technical data sheet

**Model TST40  
 for inward/outward opening doors**

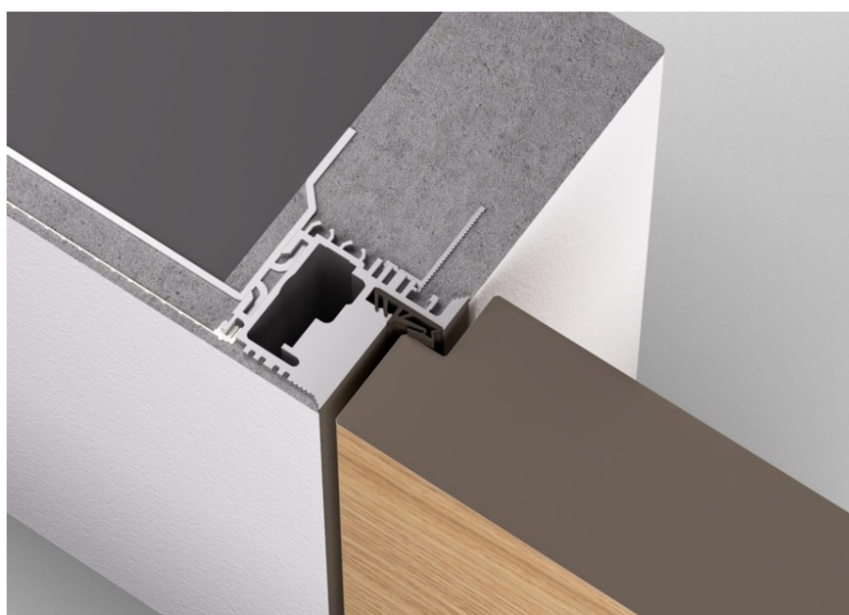

**Index**

Profile detail..... 2

Recommendations ..... 2

    Suitable hinges..... 3

    Suitable striking plates..... 3

    Suitable door closers..... 4


    Suitable seals..... 4

Door leaf ..... 5/6

    Inward opening doors ..... 5

    Outward opening doors ..... 6

## Profile detail

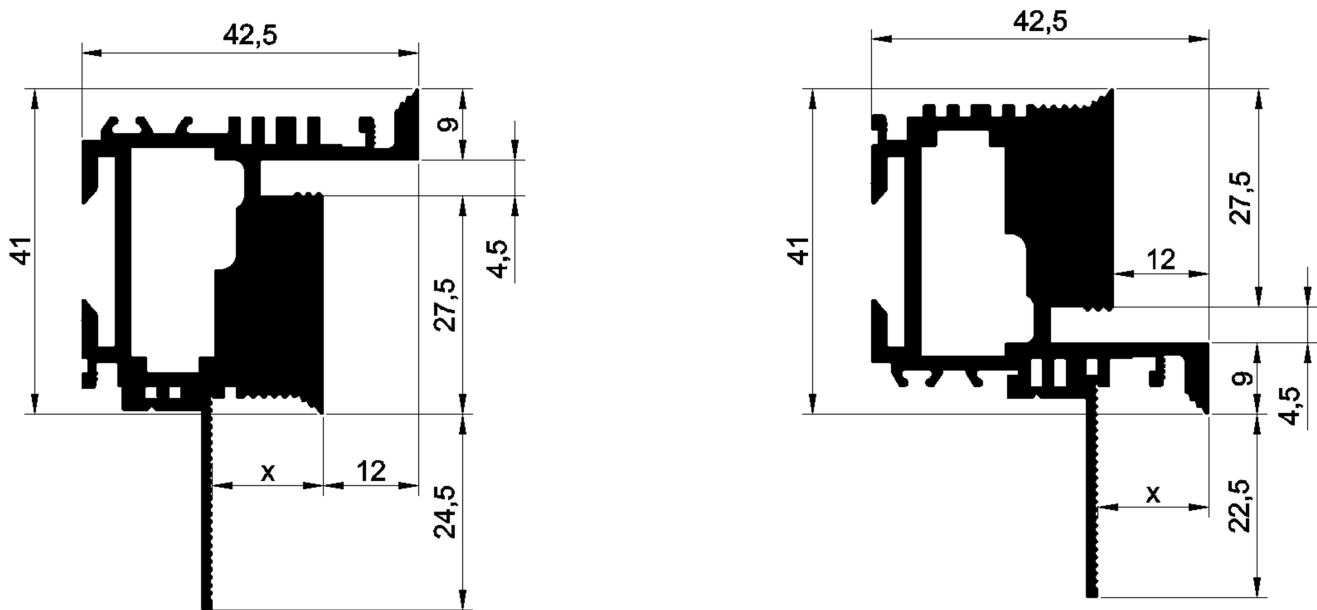

X = 11/14 mm

### Model TST40

#### Suitable for solid and dry construction

The frame profiles are supplied mitre-cut to suit door size, and machined to suit concealed hinges, lock strikes and other hardware. In combination with the snapIn corner connectors and the mounting brackets, this enables quick assembly and professional installation. The snap-in mesh ensures no plaster cracks between wall and frame. Suits standard or floor-to-ceiling doors.

Here you can find the assembling video:



masonry construction



drywall

## Recommendations

On the basis of detailed tests and long-term experiences our technical office has prepared a recommendation-list regarding the selection of hinges, closing panels and seals. These lists are practical guidelines and non-exhaustive.

<b>RECOMMENDATION</b> <b>Suitable hinges</b>		
Producer	Designation	Weight
Basys <a href="http://www.basys.biz">www.basys.biz</a>	PIVOTA DX 42 3-D (Design)	60 kg
	PIVOTA DX 43 3-D (Design)	60 kg
	PIVOTA DX 78 3-D (Design)	80 kg
Krona Koblenz <a href="http://www.kronakoblenz.com">www.kronakoblenz.com</a>	Kubica 2400	40/60 kg
Simonswerk <a href="http://www.simonswerk.com">www.simonswerk.com</a>	Tectus TE 240 3-D	60 kg

<b>RECOMMENDATION</b> <b>Suitable striking plates</b>	
Producer	Designation
AGB <a href="http://www.agb.it">www.agb.it</a>	Easy-Matic XT B02402.28.XX
	Minimal XT B01402.11.XX
	Alutop XT B02402.09.XX
	Minimal PLUS XT B02402.05.XX
	Electric B02800.90.XX
Bonaiti Serrature SpA <a href="http://www.bonaiti.it">www.bonaiti.it</a>	Bonaiti GIS8
	Bonaiti GI98
	Bonaiti G992
	Bonaiti G995
	Bonaiti GR95
Dormakaba <a href="http://www.dormakaba.com">www.dormakaba.com</a>	SB/MAG/210.20.2,0
	SB/MAG/120.20.2,0
	SB12/MAG/VAR/DS



KfV <a href="http://www.kfv.de">www.kfv.de</a>	FSS 116-200-20HR/41
	FSS 116-245-20HR/41
	FSS 116-245-18HR/41
	FSS 116-120-20HR/41
SSF <a href="http://www.ssf.de">www.ssf.de</a>	MG50

<b>RECOMMENDATION</b> <b>Suitable door closers</b>	
Producer	Designation
Athmer <a href="http://www.athmer.com">www.athmer.com</a>	Porti 5371

<b>RECOMMENDATION</b> <b>Suitable seals/gaskets</b>	
Producer	Designation
Deventer Profile GmbH <a href="http://www.deventer-profile.com">www.deventer-profile.com</a>	DS 6922 a
Helmut Goll GmbH <a href="http://www.helmutgoll.com">www.helmutgoll.com</a>	A1020
Primo Profile GmbH <a href="http://www.primo.com">www.primo.com</a>	ACF 5602 H
SchlegelGiesse – Giesse S.p.A <a href="http://www.schlegelgiesse.com">www.schlegelgiesse.com</a>	QL 3096
	QL 3104


## Door leaf

### Inward opening doors

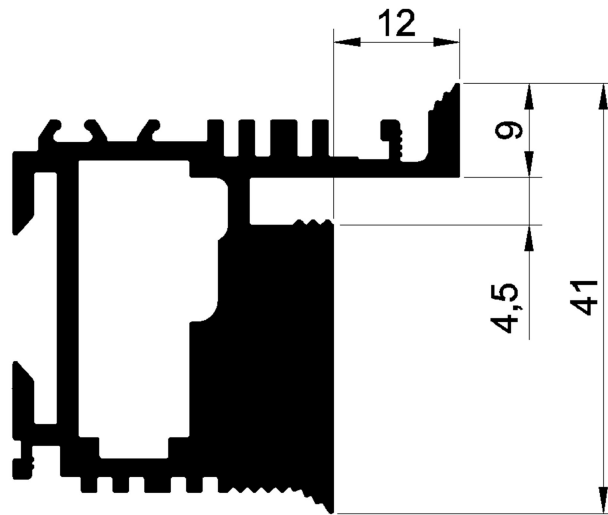


Detachable profile for drywall


Rebate dimension for 5mm door seal

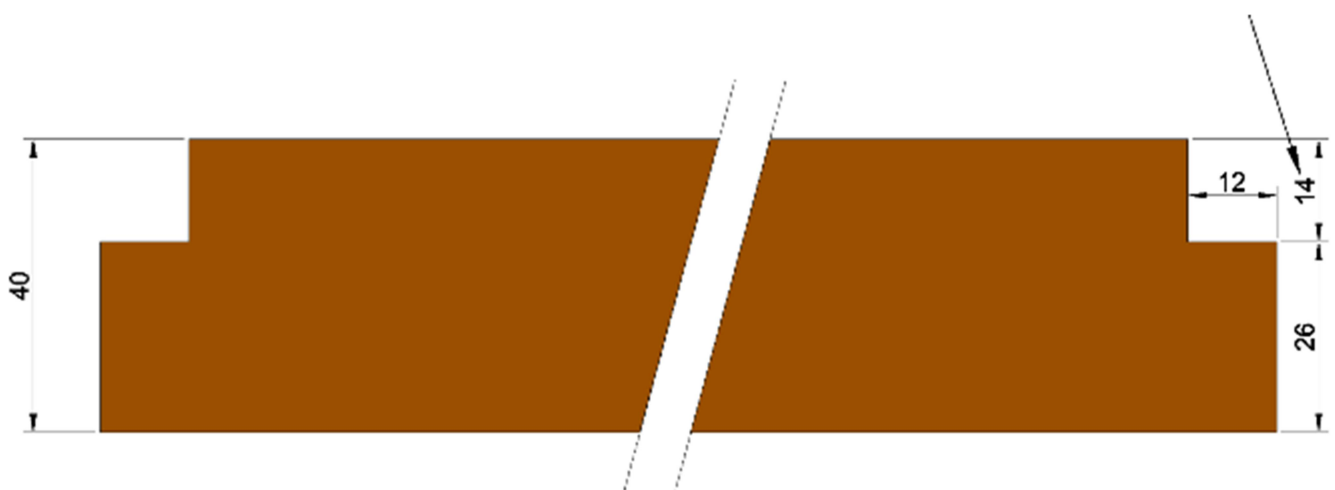

## Outward opening doors

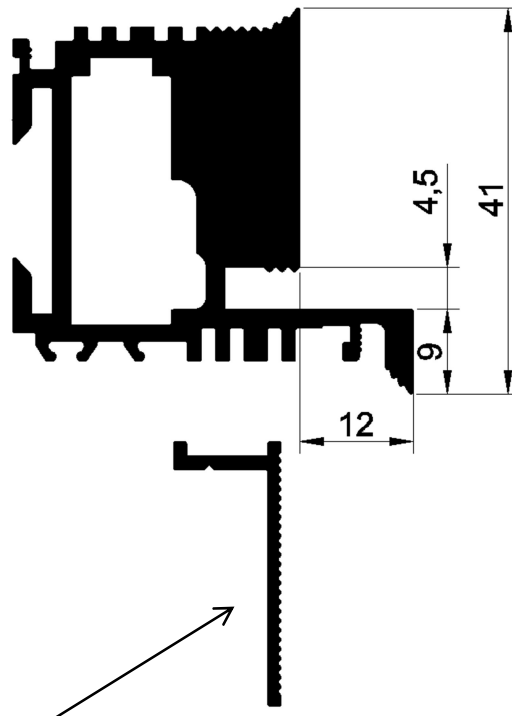

Detachable profile for drywall

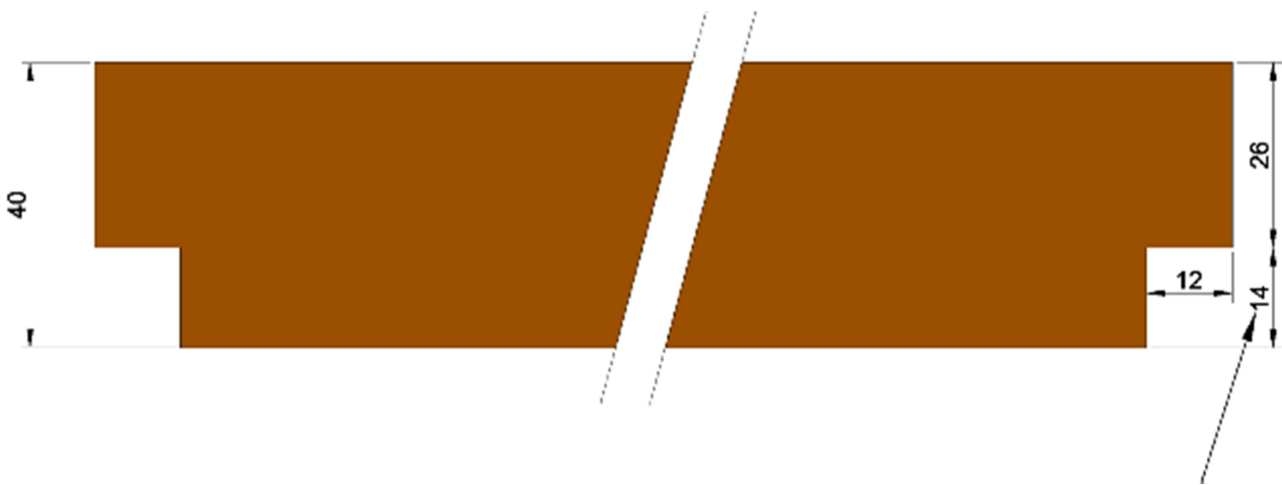

**Rebate dimension for 5mm door seal**

We guarantee for a high quality of our products. Our processing guidelines are based on tests and practical experiences; they are only indication without assurance of properties, we have no influence on condition of construction sites and the realizations of the works.

Country specific regulations, which consist on regional standards, building regulations, processing and industrial guidelines, can guide to specific processing recommendations.