


Technical data sheet

**Modell TST56 Pivot  
 for inward/outward opening Pivot-doors**

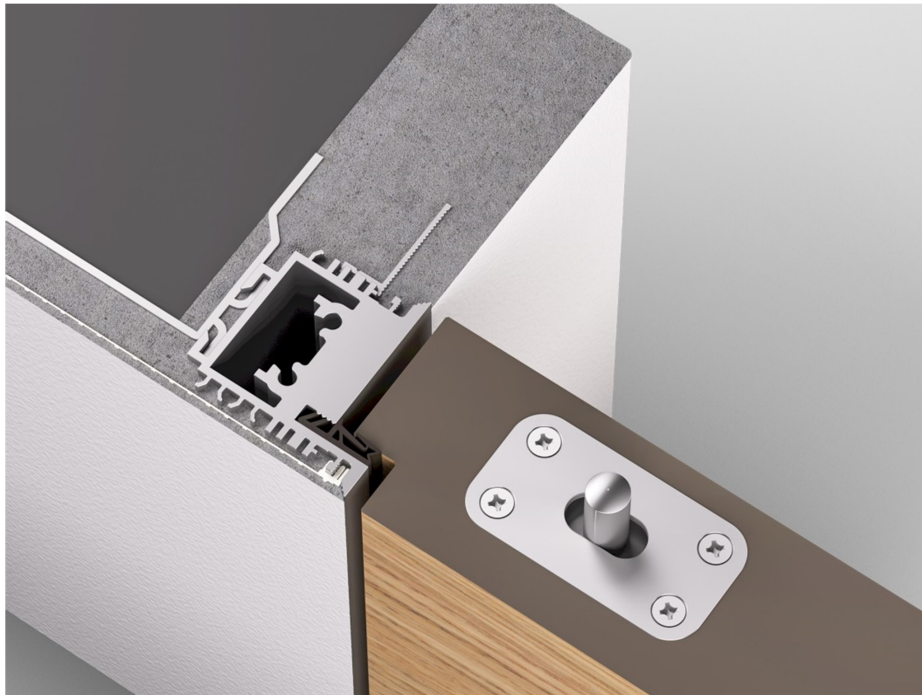

**Index**

Profile detail..... 2

Recommendations ..... 3

    Suitable pivot-closer ..... 3

    Suitable striking plates..... 3


    Suitable seals..... 4

Door leaf ..... 5/6

    Inward opening doors ..... 5

    Outward opening doors ..... 6

## Profile detail

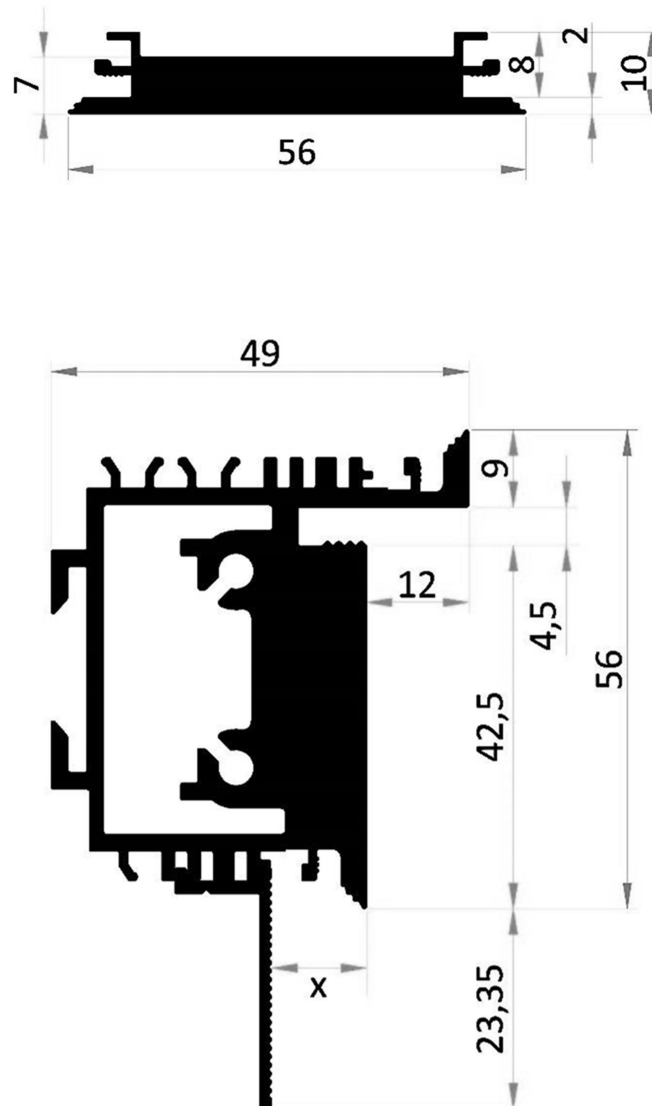

### Modell TST56 Pivot

#### Suitable for solid and dry construction

The frame profiles are supplied mitre-cut to suit door size, and machined to suit pivot closers, lock strikes and other hardware. Quick assembly and professional installation with twist-in mounting brackets. The snap-in mesh ensures no plaster cracks between wall and frame. Suits standard or floor-to-ceiling doors.

## Recommendations

On the basis of detailed tests and long-term experiences our technical office has prepared a recommendation-list regarding the selection of hinges, closing panels and seals. These lists are practical guidelines and non-exhaustive.

<b>RECOMMENDATION Suitable Pivot-closer</b>		
Producer	Designation	Weight
FritsJurgens <a href="http://www.fritsjurgens.com">www.fritsjurgens.com</a>	System M32	150kg
	System M32+	300kg
JNF <a href="http://www.jnf.pt">www.jnf.pt</a>	IN.05.204	100kg



<b>RECOMMENDATION SUITABLE STRIKING PLATES</b>	
Producer	Designation
AGB <a href="http://www.agb.it">www.agb.it</a>	EASY-MATIC XT B01402.11.XX
	MINIMAL XT B02402.05.XX
	ALUTOP XT B0204.09.XX
	MINIMAL PLUS XT B02402.28.XX
BasyS <a href="http://www.basys.biz">www.basys.biz</a>	BasyS SBL 2-L adjustable V3 li/re, magnetic
	BasyS SBL Nr. 64 adjustable V3 li/re
	BasyS SBL Nr. 106 adjustable V3 magnetic
Bonaiti Serrature SpA <a href="http://www.bonaiti.it">www.bonaiti.it</a>	G992
	B998
	G995
	GI98
	GIS8
	GR95
	GR96
	GR97
	GS91
Dormakaba <a href="http://www.dormakaba.com">www.dormakaba.com</a>	SB/MAG/120.20.2,0
	SB/MAG/210.20.2,0
	SB12/MAG/VAR/DS
KFV <a href="http://www.kfv.de">www.kfv.de</a>	FSS 116-120-20HR
	FSS 116-200-20HR
	FSS 116-245-18HR
	FSS 116-245-20HR

**RECOMMENDATION**  
**Suitable seals/gaskets**

Producer	Designation
Deventer Profile GmbH <a href="http://www.deventer-profile.com">www.deventer-profile.com</a>	DS 6922a
Helmut Goll GmbH <a href="http://www.helmutgoll.com">www.helmutgoll.com</a>	A1020
Primo Profile GmbH <a href="http://www.primo.com">www.primo.com</a>	ACF 5602 H
SchlegelGiesse – Giesse S.p.A <a href="http://www.schlegelgiesse.com">www.schlegelgiesse.com</a>	QL 3096
	QL 3104


# Door leaf

## Inward opening doors

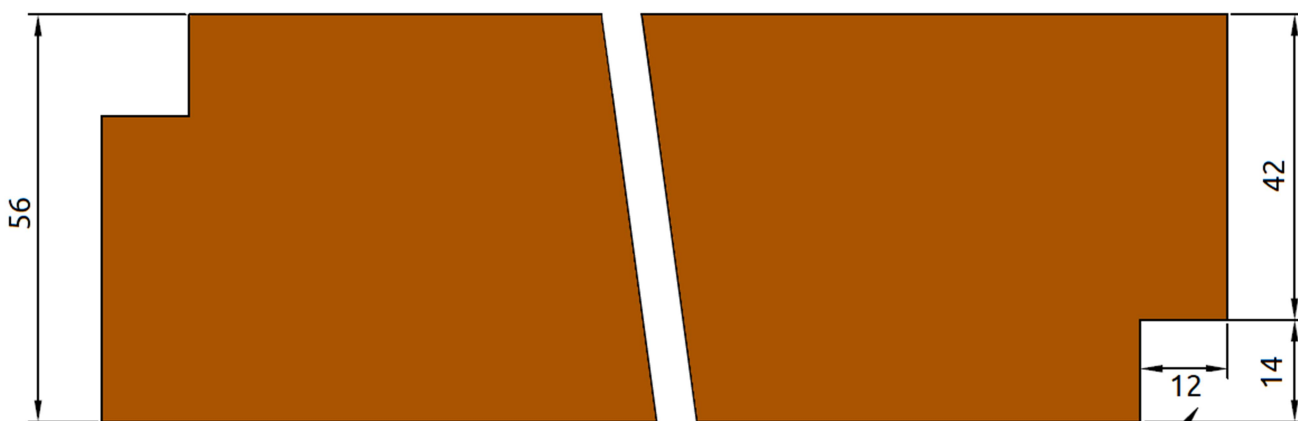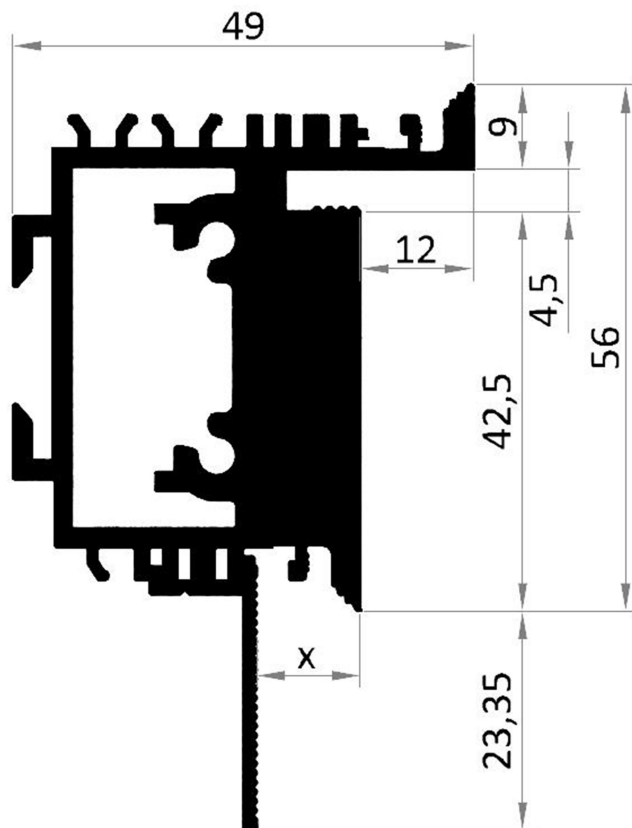


Rebate dimension for 5mm door seal

## Outward opening doors

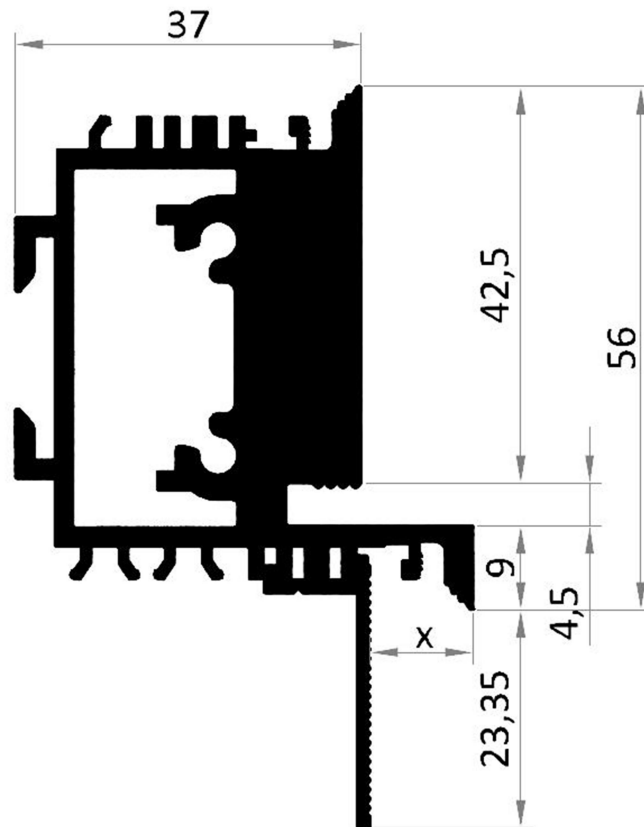

Rebate dimension for 5mm door seal

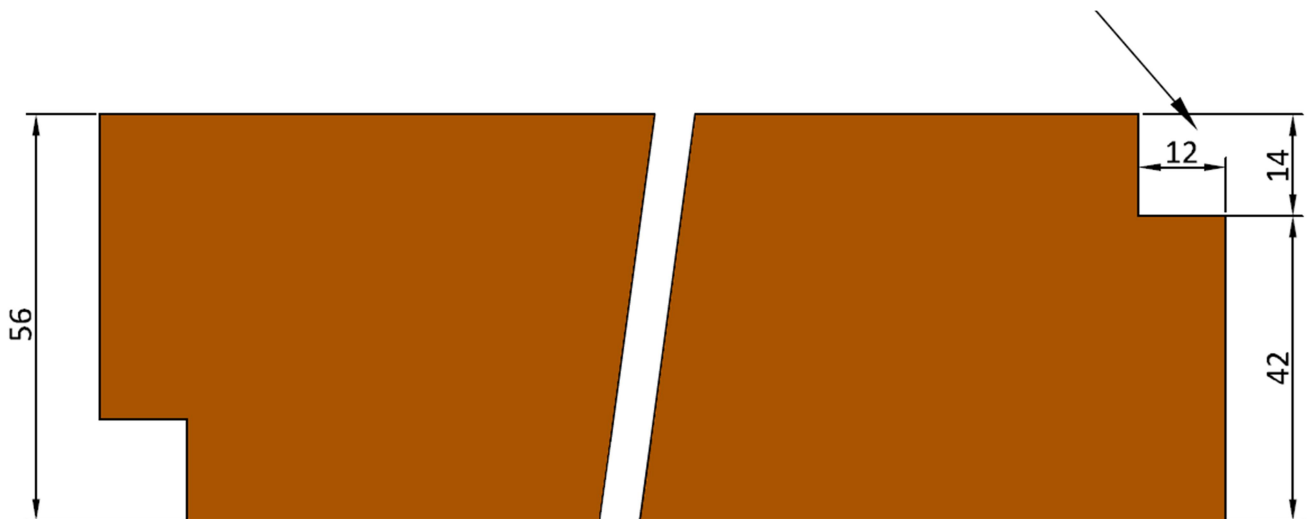

We guarantee for a high quality of our products. Our processing guidelines are based on tests and practical experiences; they are only indication without assurance of properties, we have no influence on condition of construction sites and the realizations of the works, Country specific regulations, which consist on regional standards, building regulations, processing and industrial guidelines, can guide to specific processing recommendations.