




**WALL FLUSH SKIRTING BOARDS
AND SHADOW GAP PROFILES**

for design-lovers



THE INNOVATIVE BUILDING TECHNIQUE FOR SUPERIOR STANDARDS

Functional fitting due to a unique plug system



The flush skirting meets simple, timeless elegance with comfort and modern well-being in your own home. Suitable for solid and dry construction.



Annoying dusting of the skirting board upper edge and thus also the resulting wiping marks on the walls belong to the past.




Since there is no direct contact between floor, skirting and brickwork, there will be no floor vibrations transmitted.



Quick and easy assembly trough the patented plug-system with corresponding corner and linear connectors. This eliminates the need for timeconsuming mitre cut.




The skirting profile is applied directly to the raw brickwork before the plasterwork. The top edge conduces as a guideline for the vertical and horizontal arbor. That simplifies the plasterwork and saves valuable time when setting the edges.



New standards in material selection: from the classic wooden types up to aluminium and stainless steel, dirt-repellent surfaces, Corian, Carbon and many more.




Indirect lighting with LED stripes in the skirting boards allow new design of the possibilities in the lighting engineering.



Also possible to use the skirting boards for steps, landings, stairs and curves. Simple but perfect.



- cut the profiles to size
- attach corner pieces
- mounting adhesive on rear side spread over the entire surface
- align with height
- fix it
- before laying the floor covering remove protective film
- insert skirting board
- that's it!

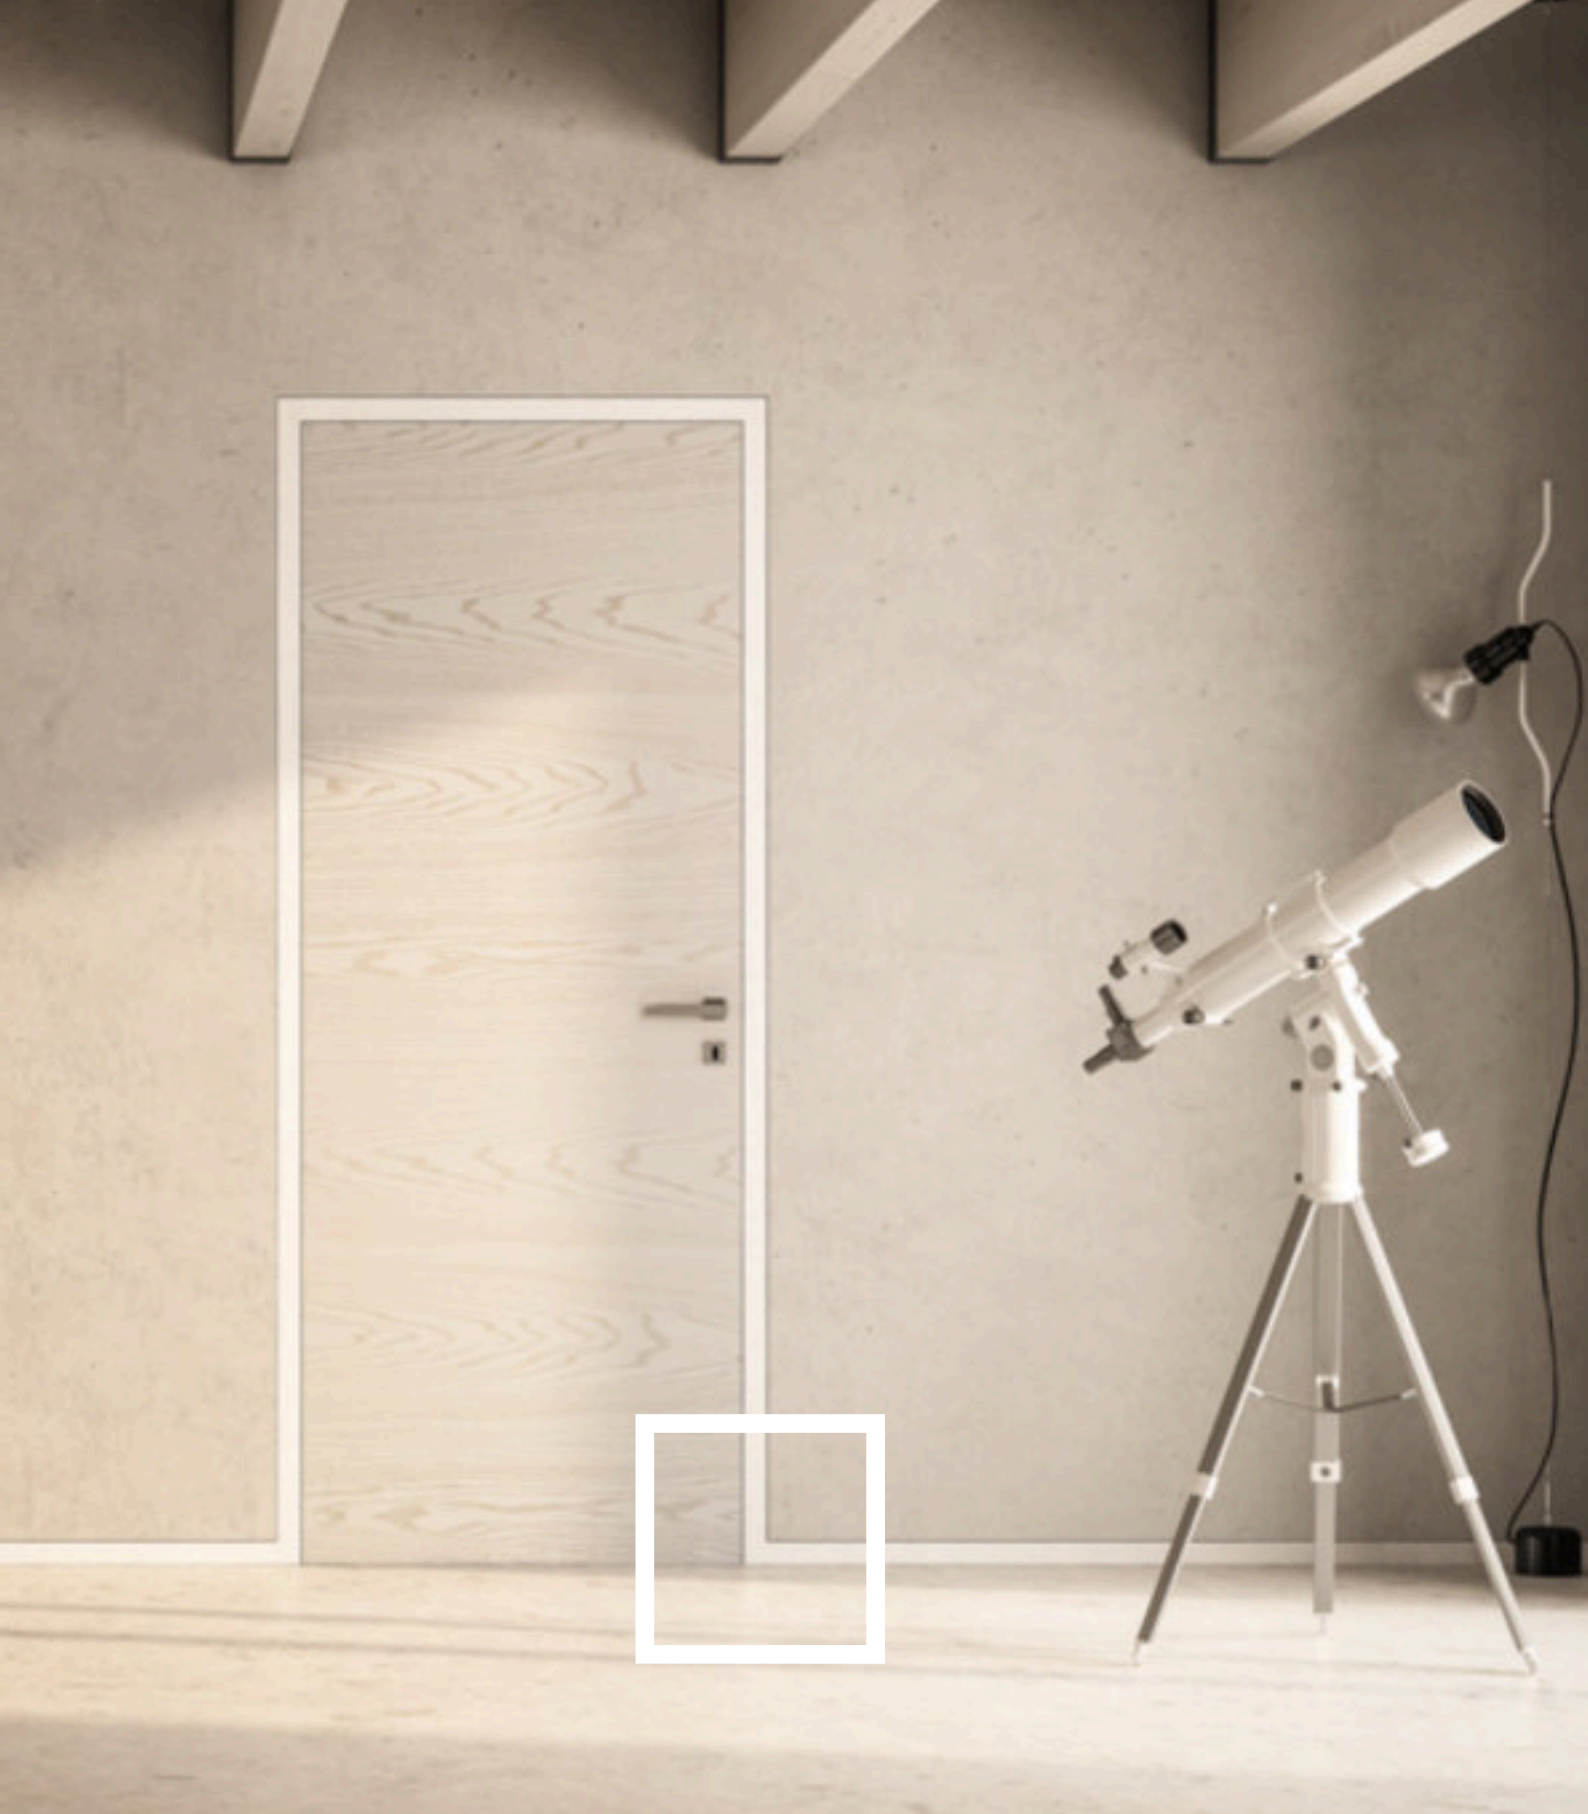

AGS-SYSTEMS

functionality and design

AGS-systems, the internationally operating Italian company, is the specialist for wall-flush system solutions and stands for innovation, functionality and the realization of minimalist architecture.



© Asco Türen

ARCHITECTURE MEANS

the art of designing spaces while considering the harmonious interplay of all elements. The flush-mounted skirting board design shapes every room, radiates relaxation and elegance and enhances living quality.



© Gordini Remo

MINIMAL - AESTHETIC

Hygienic - Functional – Easy to assemble



HARMONIOUS PERFECTION

clear lines



HIGH LIVING COMFORT

for the discerning

MODEL LIGHT

aluminium profile for wooden skirting boards



product-features

- pre-drilled concealed profile in aluminium including protection foil
- profile length: 2,000 mm
- profile depth: 15 mm
- max. material depth: 9 mm

model

LIGHT 46
profile height: 46 mm
for masonry
for drywall

art. 10046
art. 10045

LIGHT 60
profile height: 60 mm
for masonry
for drywall

art. 10061
art. 10060

LIGHT 80
profile height: 80 mm
for masonry

art. 10080




ACCESSORIES

internal corner

for LIGHT 46
for LIGHT 60/80

art. 11046
art. 11060



external corner

for LIGHT 46
for LIGHT 60/80

art. 12046
art. 12060



connecting strap

for LIGHT 46/60/80

art. 13000



connecting strap variable

for LIGHT 46/60/80

art. 13004



connecting strap for stairs

for LIGHT 46/60/80

art. 13001



mounting foam free of CFC, PFC and HFC - green PU- Line

art. 50010

MODEL C70

aluminium profile for tiles/clinker/
natural stones



product-features

- pre-drilled concealed profile in aluminium including protection foil
- profile length: 2,000 mm
- profile depth: 15 mm
- max. material depth: 12 mm

model

C70
profile height: 70 mm
for masonry
for drywall

art. 10171
art. 10170




ACCESSORIES

internal corner

for C70

art. 11070



external corner

for C70

art. 12070



connecting strap

for C70

art. 13002



connecting strap variable

for C70

art. 13005



connecting strap for stairs

for C70

art. 13003



mounting foam free of CFC, PFC and HFC - green PU- Line

art. 50010

MODEL Z
concealed profile for drywall



product-features

- concealed profile with self-adhesive back
- profile length: 2,300 mm

model

Z10

profile height: 61 mm
for gypsum plasterboard: 10 mm
max. material depth: 5.5 mm
for drywall
aluminium cover powder-coated RAL9010
aluminium cover powder-coated RAL9016
aluminium cover anodized

art. 10090
art. 40100
art. 40110
art. 40120

Z12

profile height: 58 mm
for gypsum plasterboard: 12.5 mm
max. material depth: 8 mm
for drywall
aluminium cover powder-coated RAL9010
aluminium cover powder-coated RAL9016
aluminium cover anodized

art. 10091
art. 40101
art. 40111
art. 40121

Z15

profile height: 56 mm
for gypsum plasterboard: 15 mm
max. material depth: 10.5 mm
for drywall
aluminium cover powder-coated RAL9010
aluminium cover powder-coated RAL9016
aluminium cover anodized

art. 10092
art. 40102
art. 40112
art. 40122

Z16

profile height: 55 mm
for gypsum plasterboard: 5/8"
max. material depth: 11.5 mm
for drywall
aluminium cover powder-coated RAL9010
aluminium cover powder-coated RAL9016
aluminium cover anodized

art. 10093
art. 40103
art. 40113
art. 40123



ACCESSORIES


connecting strap

for Z-profile art. 13002



connecting strap variable

for Z-profile art. 13005



connecting strap for stairs

for Z-profile art. 13003



CONNECTING ELEMENTS

for wall flush skirting boards

Perfect transitions of lines are essential for design lovers. The sophisticated system with its specially manufactured connecting elements offers the possibility to connect wall flush skirting boards directly to the door frames in order to realize a seamless transition.





PERFECT EDGES for high-quality results

MODEL S22 aluminium shadow gap profile



product-features

- for masonry and drywall including protection foil
- profile length: 2,000 mm
- profile height: 22+25 mm
- profile depth: 15 or 13.2 mm
- recess: 9.7 mm
- max. shadow gap height: 22 mm

model

S22
for masonry and drywall

art. 10022



MODEL S20 aluminium shadow gap profile black anodized



product-features

- for masonry and drywall including protection foil
- black anodized
- profile length: 2,000 mm
- profile height: 20+17 mm
- profile depth: 14 or 13.5 mm
- recess: 11 mm
- max. shadow gap height: 20 mm

model

S20
for masonry and drywall

art. 10020



ACCESSORIES

connecting strap

for S22

art. 13000

connecting strap

for S20

art. 13002



connecting strap variable

for S22

art. 13004

connecting strap variable

for S20

art. 13005



connecting strap for stairs

for S22

art. 13001

connecting strap for stairs

for S20

art. 13003



art. 50010 mounting foam free of CFC, PFC and HFC - green PU- Line

MODEL ILLU A
aluminum ceiling shadow gap profile
suitable for LED strip installation



product-features

- for masonry and drywall including protection foil
- black anodized
- profile length: 2,000 mm
- profile heigh: 55 mm
- profile depth: 42 mm
- recess: 17 mm
- max. shadow gap height: 30 mm

model

ILLU A
for masonry and drywall **art. 10024**

diffusor for ILLU A/B
profile length: 2,000 mm **art. 10026**



MODEL ILLU B
aluminum shadow gap profile
suitable for LED strip installation




product-features

- for masonry and drywall
- black anodized
- incl. protective foil
- profile length: 2,000 mm
- profile heigh: 55 mm
- profile depth: 16.5 mm
- recess: 15 mm
- max. shadow gap height: 25 mm

model

ILLU B
for masonry and drywall **art. 10025**

diffusor for ILLU A/B
profile length: 2,000 mm **art. 10026**

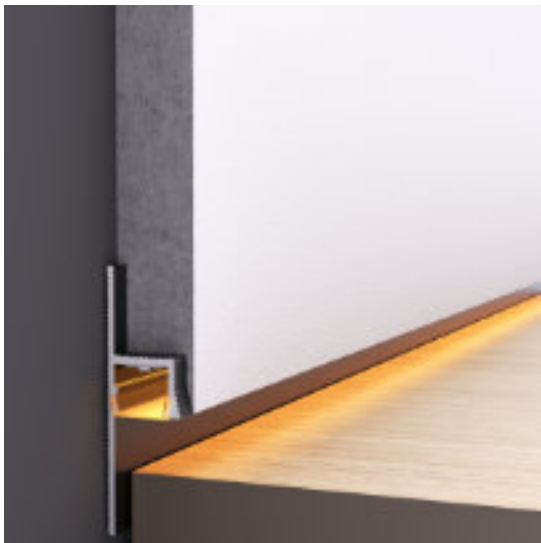

SEAMLESS ELEGANCE
for aesthetics, functionality and harmony



AGS-systems srl

Stava 47B – 39025 Naturno (BZ) Italy – tel. +39 0473 666376
info@ags-systems.com – www.ags-systems.info