


Wallflush skirting board

Model Z for Drywall



Description

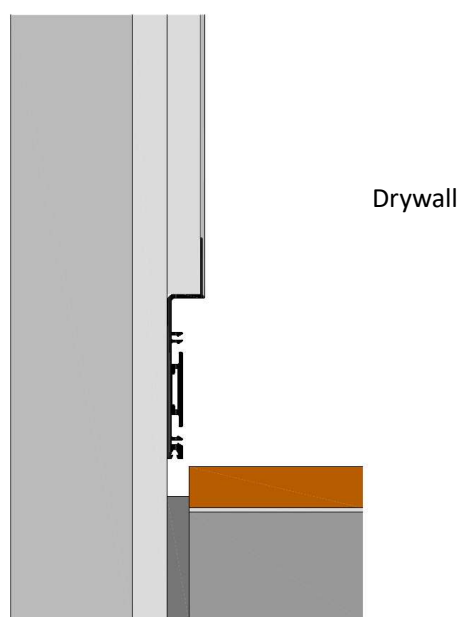

The Z-profile is a PVC profile designed for flush-fitting skirting boards in drywall construction. With their clean lines and seamless transition between the skirting board and the plaster, they enhance the room's appearance and meet the very latest design standards. Thanks to their special construction, there is no direct contact between the floor, the skirting board and the masonry, thus preventing the transmission of impact noise. The profiles are versatile and can also be fitted on stairs.

Material



The flush-mounted profiles are made of PVC.

The profiles are 2300 mm long.

When wet, cement and its derivatives produce alkaline substances which, under certain circumstances, could lead to corrosion.

Exposure to moisture or salt water may cause the surface of the profile to discolour.

However, as the flush-mounted profile is not directly visible, this has no effect on its quality once installed.

Installation



The profiles are fitted with double-sided adhesive tape on the back. The patented interlocking system features linear joints, enabling precise and rapid installation and thus ensuring perfect lines. Installation can be carried out with or without a subfloor and is carried out prior to plastering. Once completed, a wide variety of visible skirting boards can be fitted, depending on the desired aesthetic.

For installations in flats or houses where proof of energy efficiency is required, it is recommended that the external walls in the skirting board area be finished with an airtight smooth render.

Please read the assembly instructions carefully before starting the assembly work. Only use the materials recommended by AGS-systems for professional installation. Otherwise any liability expires.

Here you can find the installation video:



Drywall

Skirting boards



A wide variety of materials can be fitted as skirting boards to the Z concealed profiles. This also includes the aluminum cover profiles in RAL 9010/9016 or anodized from AGS-systems.

Profiles

The PVC profiles are 2300 mm long and have a self-adhesive backing.

Model Z		
<u>Drywall</u>		
Description	Item number	Height (x)
Z10	10090	61 mm
Z12	10091	58 mm
Z15	10092	56 mm
Z16	10093	55 mm
<u>Aluminium cover for Z-Profile</u>		
Description	Item number	Surface
Z10	40100	RAL9010
Z10	40110	RAL9016
Z10	40120	anodized
Z12	40101	RAL9010
Z12	40111	RAL9016
Z12	40121	anodized
Z15	40102	RAL9010
Z15	40112	RAL9016
Z15	40122	anodized
Z16	40103	RAL9010
Z16	40113	RAL9016
Z16	40123	anodized

We guarantee for a high quality of our products. Our processing guidelines are based on tests and practical experiences; they are only indication without assurance of properties, we have no influence on condition of construction sites and the realizations of the works

Country specific regulations, which consist on regional standards, building regulations, processing and industrial guidelines, can guide to specific processing recommendations.