


Specialframe

REVI20



Description

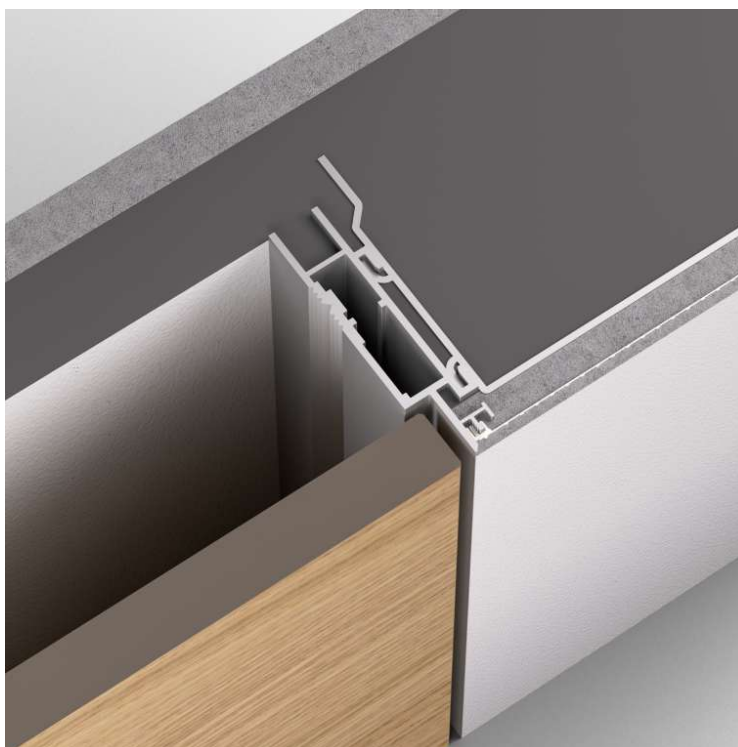

The REVI20 model is suitable for solid and drywall construction and was specifically designed for creating frameless wall niches. As a CUSTOMIZED frame, the aluminum profiles are cut to length according to customer specifications, milled as required, and delivered fully assembled with all accessories included.

The snap-in plaster mesh ensures a secure connection between the frame and the wall, thereby preventing hairline cracks. The SnapIn corner connectors and screw-in mounting brackets ensure quick and professional installation.

Material



The door profiles are made of raw untreated aluminum alloy EN EW-6060 (Al-MgSi) with possible toleration according to UNI EN 755-9. The above alloy offers good strength values, is corrosion resistant and is particularly suitable as a construction material for high surface requirements.

Cement and its derivatives produce, in wet conditions, alkaline substances which can lead to corrosion if left to work on the surface of the aluminum alloy. It is therefore recommended that the profiles are always kept free of cement, adhesive and joint material.

Corrosion is prevented by the recommended on-site priming and painting of the profile in wall paint.

Aluminum is not resistant against all chemical compounds, therefore contact with hydrogen chloride (HCl) and phosphoric acid (H₃PO₄) should be avoided. Products of cleaning stones, ceramics, etc. can also damage the surface. Moisture or salt water can discolour the surface of the profile.

Assembly



The assembly must be done during shell construction. Once the plastering work is complete, the door is installed.

The manual guide must be read carefully before beginning with the assembly of the frame. For a professional installation only the recommended materials from AGS-systems must be used, otherwise every liability expires.

Door leaf




The door leaf can have a thickness 19 mm and can be realized as standard to ceiling high doors.

Profile

The TL profiles are available as standard lengths of 2000mm, 3000mm and 5000mm on stock ready to be shipped in a short time. All profiles are covered by a protective film.

REVI20

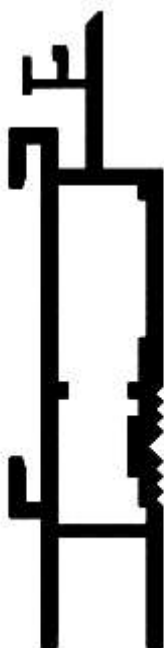

REVI20	
<u>Solid and drywall construction</u>	
Description	Item number
REVI20	10116

We guarantee for a high quality of our products. Our processing guidelines are based on tests and practical experience; they are only indication without assurance of properties, we have no influence on condition of construction sites and the realizations of the works

Country specific regulations, which consist on regional standards, building regulations, processing and industrial guidelines, can guide to specific processing recommendations.